


**RDA HD 16X16 NA Manipulator,  
 RDA WMTCHD Travel Car**

**Heavy Duty  
 16 ft x 16 ft**

The RDA MD 16X16 NA manipulator with optional heavy-duty travel car provides excellent welding results with maximum productivity through consistent and accurate placement of welding heads for automatic welding processes including inside, outside, longitudinal and circumferential welding applications and can also be used in conjunction with polishing and grinding heads. Structural steel with continuously welded roundways along with rack and pinion driven movement provide enhanced durability and extended overhaul intervals. Control is via a 7-function push button hand pendant control with a separate 5-function pendant control for use with the optional travel car. Safety features include an integrated anti-fall device and UL /CE certified control boxes with IP65-rated enclosures. All Red-D-Arc manipulators have been tested and certified by UL to establish safe working loads - a first in the weld automation industry.

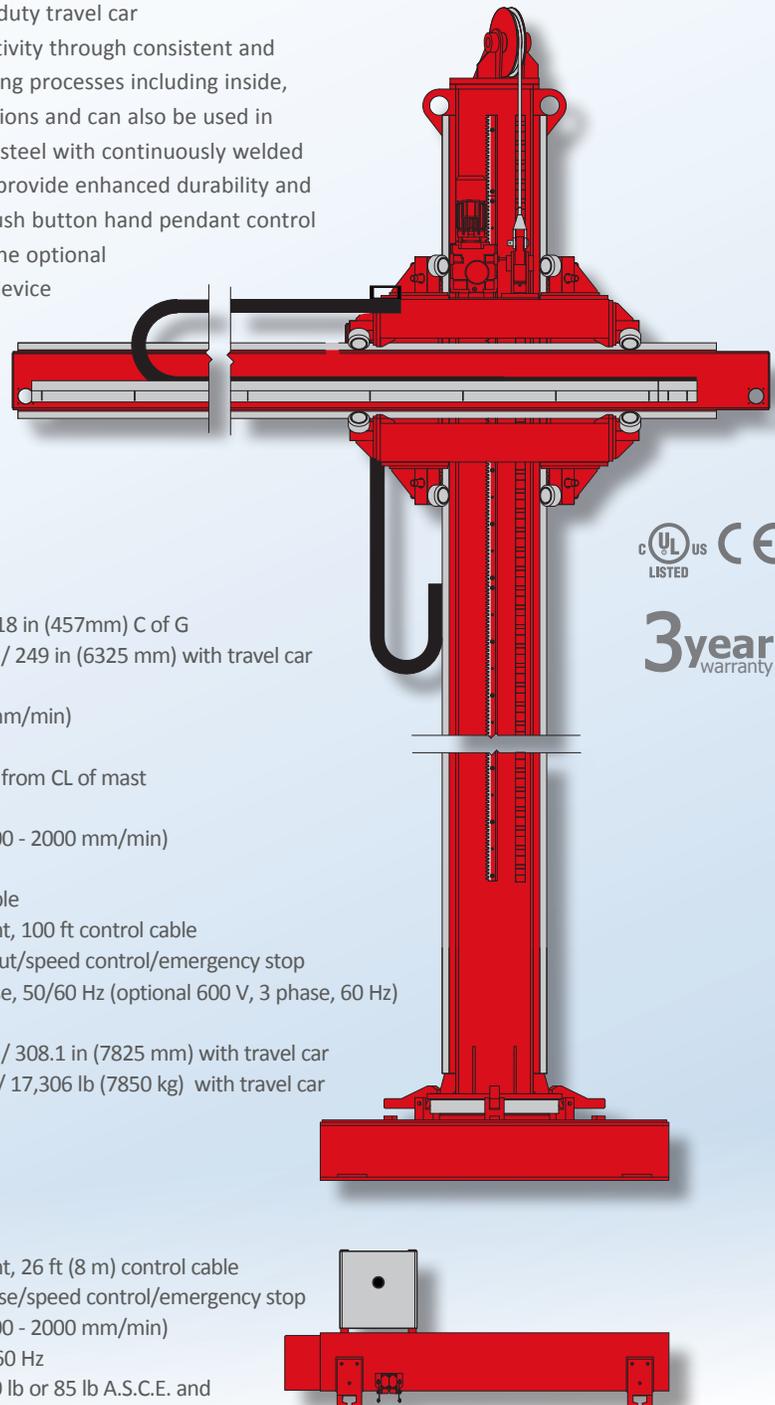

**Specifications**

Model	RDA HD 16X16 NA
Maximum Load	1000 lb (454 kg) @ 18 in (457mm) C of G
Max. Height Under Ram	236.2 in (6000 mm) / 249 in (6325 mm) with travel car
Vertical Ram Travel	196.8 in (5000 mm)
Vertical Ram Speed	78.7 in/min (2000 mm/min)
Lift Motor	0.75 kW with brake
Max. Horizontal Extension	236.8 in (6014 mm) from CL of mast
Horizontal Ram Travel	196.8 in (5000 mm)
Horizontal Ram Speed	3.9 - 78.7 in/min (100 - 2000 mm/min)
Ram Motor	0.37 kW
Rotation	Manual 360°, lockable
Control	Push button pendant, 100 ft control cable
Control Functions	Up/down/in/stop/out/speed control/emergency stop
Primary Input Power	380 to 480 V, 3 phase, 50/60 Hz (optional 600 V, 3 phase, 60 Hz)
Input Current at Rated Load	6 A
Overall Height	295.3 in (7500 mm) / 308.1 in (7825 mm) with travel car
Weight	14,331 lb (6500 kg) / 17,306 lb (7850 kg) with travel car
Control Box Ingress Protection Rating	IP65
Control Box Electrical Certification	UL508
Loading Capacity Certification	UL2011
RDA WMTCHD Travel Car	Order separately
Travel Car Control	Push button pendant, 26 ft (8 m) control cable
Control Functions	Forward/stop/reverse/speed control/emergency stop
Travel Speed	3.9 - 78.7 in/min (100 - 2000 mm/min)
Input Power	110 V, 1 phase, 50/60 Hz
Rail Gauge	56 ½ in gauge for 90 lb or 85 lb A.S.C.E. and A.R.A.-A rail

Red-D-Arc Welderentals, an Airgas company, rents and sells welding and weld-positioning equipment - around the world.

RDA HD 16X16 NA Manipulator,  
 RDA WMTCHD Travel Car

Heavy Duty  
 16 ft x 16 ft

